

**CODE NUMBER**

TRF-1024-N & TRF-1000-PB

**DESCRIPTION**

TruFlush Concealed Manual Dual Flushometer with 32mm Valve Body and Wall Plate in Polished Brass Finish for Water Closet.

**COMPOSITION**


- Valve Body: 34000007 (TRF-1024-N)
- Wall Plate: 34000033 (TRF-1000-PB)

**DETAILS**

- Full Flush Volume: 4-4.5 Lpf (1.1-1.2 gpf)
- Half Flush Volume: 2-2.5 Lpf (0.5-0.7 gpf)
- Wall Plate Finish: Polished Brass (PB)
- Valve: Piston
- Valve Body Material: Yellow Brass
- Bypass: Filtered
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud

**FEATURES**

- Polished Brass finish, corrosion-resistant, vandal resistant metal wall plate
- Easy to push manual button is ADA compliant - less than 5 lbf/22N of force required to activate
- Accurate flush volume
- Heavy duty brass valve body
- Piston color-coded by flush volume for easy identification
- Replaceable piston assembly, accessible by removing front wall plate
- Concealed shut-off sleeve adjusts flow rate
- Safety collar locks activation assembly to prevent access of internal components without shutting off water
- Fixed Volume Piston with Filtered O-ring Bypass
- Aspirator technology reduces noise post flushing
- Inlet: 1-1/4" BSP (32 mm)
- Outlet: 1-1/2" NPSM (40mm)
- Valve Body & Manual Wall Plate are sold separately


**COMPLIANCES & CERTIFICATIONS**


(ADA Compliant, GRIHA, GreenPro, EPD, WELL Building Standard)

**RECOMMENDED SPECIFICATION**

Valve shall be concealed with front access wall plate smaller than 7" x 7" and shall have integrated control stop.


**VALVE OPERATING PRESSURE (FLOWING)**

20-80 PSI (138-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

**NOTES**

All information contained within this document subject to change without notice.

**ROUGH-IN**

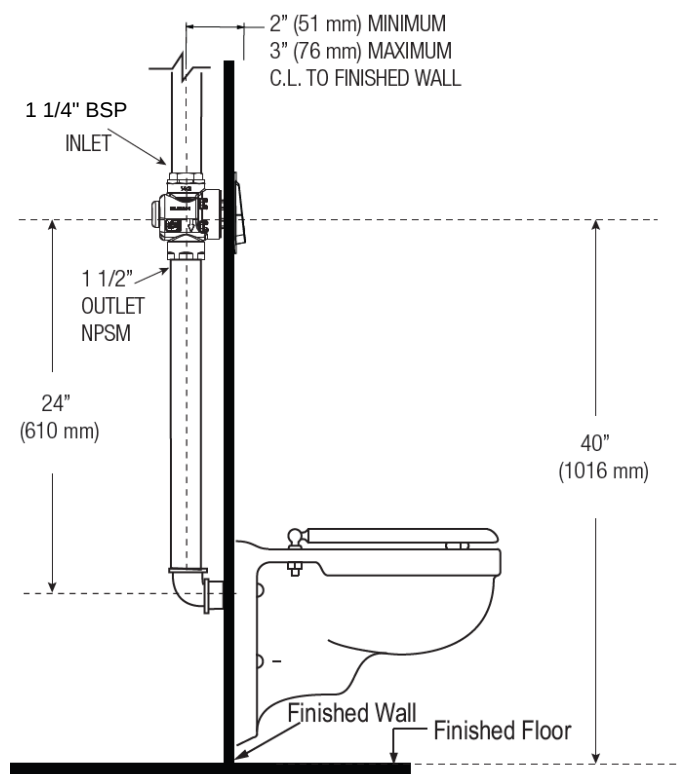

NOTE : Flush Connections shown in dotted lines not included.

