

CODE NUMBER

TRF-1024-N & TRF-1000-GB

DESCRIPTION

TruFlush Concealed Manual Dual Flushometer with 32mm Valve Body and Wall Plate in Glossy Black Finish for Water Closet.

COMPOSITION

- Valve Body: 34000007 (TRF-1024-N)
- Wall Plate: 34000034 (TRF-1000-GB)

DETAILS

- Full Flush Volume: 4-4.5 Lpf (1.1-1.2 gpf)
- Half Flush Volume: 2-2.5 Lpf (0.5-0.7 gpf)
- Wall Plate Finish: Glossy Black (GB)
- Valve: Piston
- Valve Body Material: Yellow Brass
- Bypass: Filtered
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud

FEATURES

- Glossy Black finish, corrosion-resistant, vandal resistant metal wall plate
- Easy to push manual button is ADA compliant - less than 5 lbf/22N of force required to activate
- Accurate flush volume
- Heavy duty brass valve body
- Piston color-coded by flush volume for easy identification
- Replaceable piston assembly, accessible by removing front wall plate
- Concealed shut-off sleeve adjusts flow rate
- Safety collar locks activation assembly to prevent access of internal components without shutting off water
- Fixed Volume Piston with Filtered O-ring Bypass
- Aspirator technology reduces noise post flushing
- Inlet: 1-1/4" BSP (32 mm)
- Outlet: 1-1/2" NPSM (40mm)
- Valve Body & Manual Wall Plate are sold separately

**COMPLIANCES & CERTIFICATIONS**

(ADA Compliant, GRIHA, GreenPro, EPD, WELL Building Standard)

RECOMMENDED SPECIFICATION

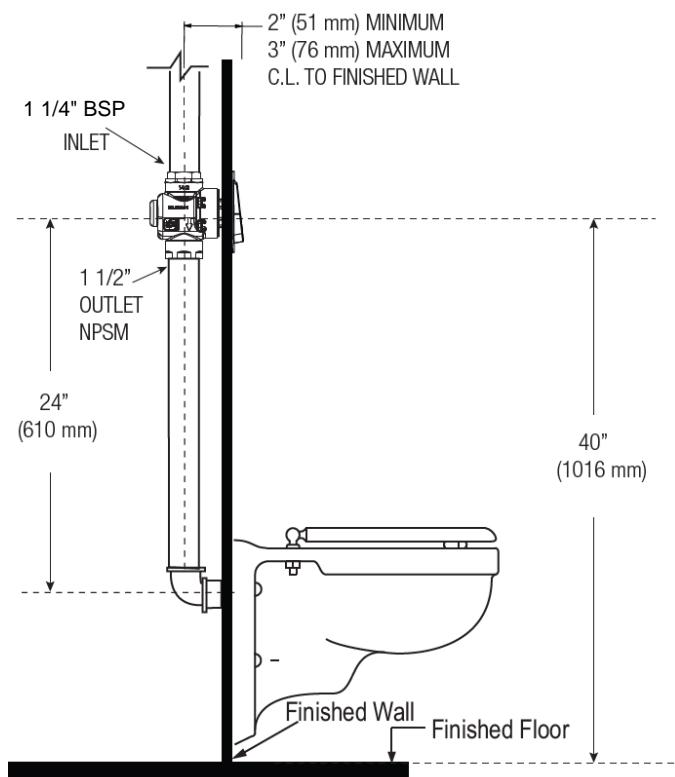
Valve shall be concealed with front access wall plate smaller than 7" x 7" and shall have integrated control stop.

VALVE OPERATING PRESSURE (FLOWING)

20-80 PSI (138-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

NOTES

All information contained within this document subject to change without notice.

ROUGH-IN

NOTE : Flush Connections shown in dotted lines not included.

