

INSTALLATION INSTRUCTIONS FOR WASH BASIN

BEFORE YOU BEGIN

 **WARNING:** Risk of personal injury or product damage. Handle with care.

- Vitreous China can break or chip if the bolts and nuts are over-tightened, or if the product is handled carelessly.
- Observe all local plumbing and building codes.
- Check for any damage on the new basin sink before installation.

RECOMMENDED TOOLS AND MATERIALS:-




Putty Knife



Adjustable Wrench



Silicone



Hacksaw



Tape Measure



Pipe Wrench



Drill



Channel Lock Pliers




Phillips Screwdriver




Regular Screwdriver


INSTALLATION GUIDELINE - For Wall-Mount Basin

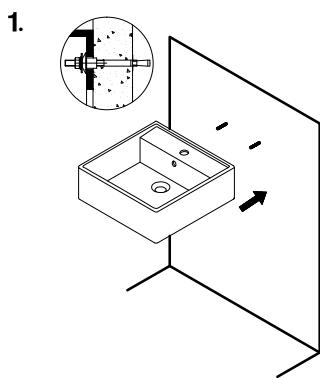


- Markup the mounting height reference from the finished floor level.
- Markup the mounting holes according to distance A & B which can be found in technical drawing.

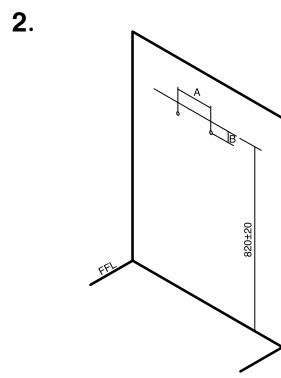


- Drill 2 holes on finished wall to accommodate the mounting screw.
- For size and dimension, please refer to the set of mounting components provided.
- Insert the expansion screws into the holes.

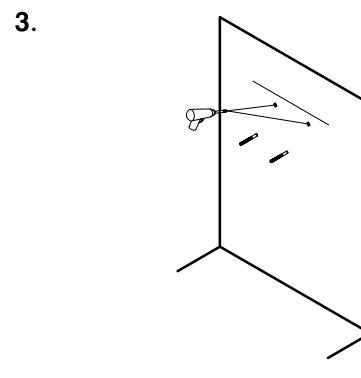


- Clean the fitting face of basin that comes into contact with the wall to ensure free of dust, dirt and grease.
- Align the ware with the mounting screw and slowly press it against the wall.
- Fasten the ware with the nuts and plastic capping as shown.

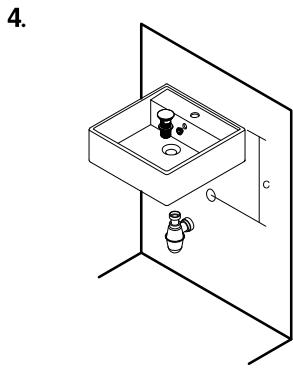

- Open a hole on wall for waste outlet according to distance C which can be found in installation diagram.
- Connect basin waste to the trap and all necessary fittings.

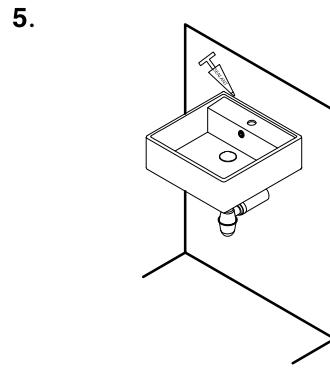


- Apply a layer of acetic cured silicone sealant around the sealing rim and fitting face of the basin.

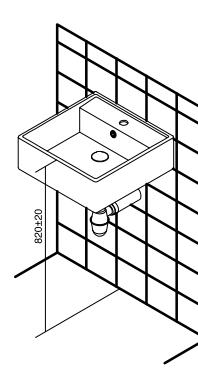

- Clean excess of silicone sealant around basin.

INSTALLATION GUIDELINE - For Under-Counter Basin

1 CUTTING THE COUNTERTOP




- Position the basin upside down on the countertop and with a grease pencil, trace the basin outline onto the countertop.
- When positioning basin, be sure to align waste pipes with basin drain.

Cutout line in counter top, in 1.25" from traced pencil line all around


2 MOUNTING THE BASIN ON TO COUNTERTOP



- Mount the drain/pop up assembly (not included) on basin before mounting the basin on the counter top.
- Ensure that the waste coupling (not included) is perfectly sealed to avoid water leakage.




3 SUPPORT THE BASIN



- Support the basin for 24 Hours.

4 FINISH THE INSTALLATION




- Install faucet (not included) following faucet manufacturers instructions.
- Finish the installation. Seal around the edges.
- Connect all supply lines and waste pipes.
- Turn on water. Check to see that the faucet and drain are operating properly and there are no leaks.

Note: Product illustrations shown are representative only; actual products may vary.


INSTALLATION GUIDELINE - For Counter-Top Basin

1 CUTTING THE COUNTERTOP




- Position the basin upside down on the countertop and with a grease pencil, trace the basin outline onto the countertop.
- When positioning basin, be sure to align waste pipes with basin drain.

3 MOUNTING THE DRAIN AND POP-UP




- Mount the drain/pop up assembly (not included) on basin before mounting the basin on the counter top.
- Ensure that the waste coupling (not included) is perfectly sealed to avoid water leakage.

2 MOUNTING THE FAUCET

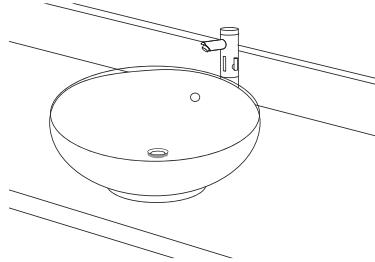

- Install faucet (not included) following faucet manufacturers instructions.

4 MOUNTING THE BASIN

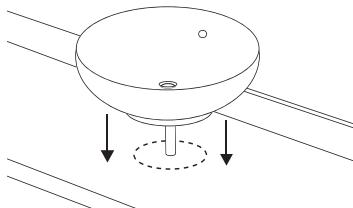

- Finish the installation. Seal around the edges.
- Connect all supply lines and waste pipes.
- Turn on water. Check to see that the faucet and drain are operating properly and there are no leaks.

Note: Product illustrations shown are representative only; actual products may vary.

SLOAN® INDIA PRIVATE LIMITED — LIMITED WARRANTY SUMMARY

Sloan India Private Limited ("sloan"), warrants its products against defects in materials and workmanship, excluding damage caused by matters beyond Sloan's reasonable control. Instructions for filing claims can be found in the limited warranty which can be obtained at <https://www.sloan.com/company/international/sloanindia> or by requesting a free copy by telephone to Sloan India toll free number 1 800 123 3080 or via mobile: +91 729 005 0961 or via landline: +91 124 490 8588. Sloan will repair or replace your defective product, or provide a refund, as your exclusive remedy.

This is only a general summary of Sloan's limited warranty so it is important to note that the specific terms, conditions, limitations and exclusions, including the duration of warranty coverage for your particular Sloan product, are contained in the actual Sloan limited warranty. The limited warranty is subject to applicable laws in your country, state, province or other jurisdiction—and disputes arising under the limited warranty are to be resolved by binding arbitration unless you provide Sloan with an opt-out notice no later than 30 days after your purchase date. In case of a conflict with this summary, the terms and conditions set forth in the complete limited warranty will prevail.

The information contained in this document is subject to change without notice.

SLOAN INDIA PRIVATE LIMITED • 344, PHASE-II UDYOG VIHAR, GURUGRAM 122015 INDIA
Phone: (+91) 124-4908588/87 • Toll Free: 1800.123.3080 • customercare@sloan.in • www.sloan.in